

LEM

1- AND 3-CALL MASTER SYSTEM

IDEAL COMMUNICATION SYSTEM FOR
SMALL OFFICES, RETAIL STORES,
WAREHOUSES, LOADING DOCKS, ETC.



MASTERS



LEM-1

LEM-3

SUBS



LE-A

LE-AN

WEATHER-RESISTANT



LE-D

LE-DA

LE-DL

POWER SUPPLY




SKK-620
(USA only)



PS-6D

NETWORK

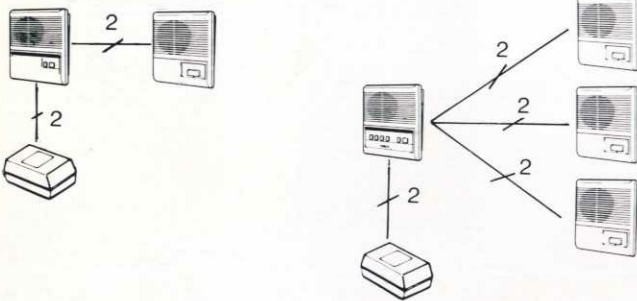

FEATURES

- 1 and 3 call masters. (LED call annunciator on 3 call master)
- Hands free operation from subs.
- Electronic call tone.
- Desk or wall-mount.
- Trim-line design.

SPECIFICATIONS

Power source	DC 6V. Use a PS-6D (SKK-620 in USA) power supply.					
Current consumption	Max. 200mA.					
Calling	Master to sub...electronic call tone or voice Sub to master...electronic call tone (call tone & LED 20 second display on LEM-3)					
Communication	Press-to-talk operation at master.					
Installation	Desk or wall mount (LEM-1 w/bracket)					
Wiring	2 wires per sub (non-polarized).					
Wiring distance	AWG	24AWG	22AWG	20AWG	18AWG	16AWG
	DISTANCE	400'	650'	1000'	1600'	2400'
	DIAMETER	0.5mm	0.65mm	0.8mm	1.0mm	1.2mm
	DISTANCE	120m	200m	300m	480m	720m
Dimensions and weight (H×W×D)	LEM-1; 160×132×51(mm); 6-5/16"×5-3/16"×2" Approx. 300g(0.66 lbs.) LEM-3; 180×143×55(mm); 7-1/16"×5-5/8"×2-3/16" Approx. 400g(0.88 lbs.).					

Distributed by;

COMMUNICATION SYSTEMS

AIPHONE
 HOME, BUSINESS, INDUSTRY