

Overview

- UL Recognized DIN Rail mountable relays w/base module.

RDC12

- 12VDC operation.
- Current draw 86mA.

RDC24

- 24VDC operation.
- Current draw 43mA.

RDC48


- 48VDC operation.
- Current draw 20mA.

Specifications

- 10 amp/220VAC or 28VDC DPDT contacts.
- DIN Rail mountable.

Dimensions: 2.7”L x 1.375”W x 2.375”H

Wiring Diagram

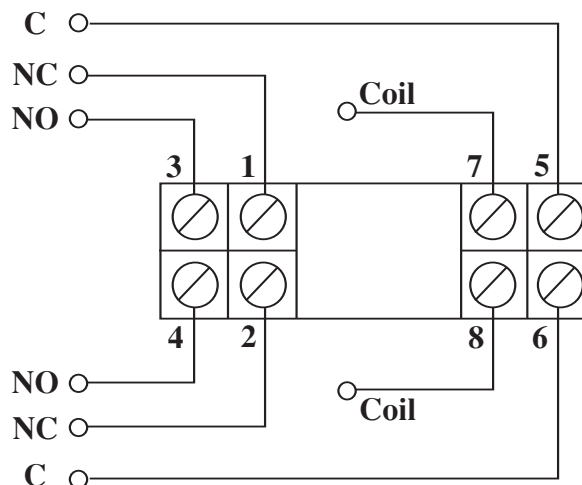

Agency Approvals



UL Recognized Component.