



# OD850 Series Outdoor TriTech Detectors



- ▶ **Motion Analyzer II PIR signal processing**
- ▶ **Linear travel distance (LTD) microwave signal processing**
- ▶ **Two sensitivity levels**
- ▶ **Timed relay output adjustable from two sec to 10 min**
- ▶ **AND/OR mode**
- ▶ **Draft and insect immunity**

The OD850 Series TriTech detectors are for use outdoors and in other harsh environments. They use a combination of passive- infrared (PIR) and microwave detection with advanced signal processing.

The OD850 Series is intended for use in the following countries:

Model	Countries
OD850-F1	Belgium, Czech Republic, Denmark, Greece, Hungary, Italy, Netherlands, Norway, Poland, Romania, Spain, Sweden, Ukraine, the Americas and the Asia/Pacific Region
OD850-F2	France, UK

## System Overview

The detectors process PIR signals with Motion Analyzer II signal processing and microwave signals with Linear Travel Distance (LTD) signal processing.

The detectors can distinguish between small, repetitive motions such as tree limbs moving in the wind and the more purposeful motions of intruders. These advanced processing techniques and the detectors' mechanical design combine to provide superior performance in a wide range of weather conditions.

## Functions

### Motion Analyzer II Processing

This PIR signal processor uses multiple thresholds and timing windows to analyze timing, amplitude, duration, and polarity of signals to make an alarm decision. Extreme levels of thermal and illumination disturbances caused by hot and cold drafts, sunlight, or lightning do not cause an alarm.

### LTD Microwave Signal Processing

This microwave signal processor measures the linear travel distance of a target to make an alarm decision. It eliminates alarms for objects that move but do not travel, such as tree limbs and hanging signs.

### Two Sensitivity Levels

The detectors have two user-selectable PIR sensitivity settings:

Standard sensitivity is the recommended setting for a minimum of false alarms. The detector tolerates environment extremes on this setting.

Intermediate sensitivity is the recommended setting for any location where an intruder is expected to cover only a small portion of the protected area. The detector tolerates normal environments on this setting. This setting identifies intruders more quickly, but may produce more false alarms.

**Adjustable Timed Relay Output**

In addition to an alarm relay, there is a Form C, unsupervised, timed relay contact that alternates state 1 sec after an alarm and follows a user-selectable timer. The time expires at the set time after the last alarm (it resets on each new alarm).

**AND/OR Mode**

This DIP-switch setting specifies whether the detector reports alarm situations in the AND mode (when both technologies simultaneously sense an alarm condition) or in the OR mode (when either the PIR or microwave technology senses an alarm state). OR mode provides faster detection in some conditions as the detector activates the alarm relay based on a single technology input.

**LEDs**


The high-efficiency LEDs (one red and one green) use the same technology as traffic lights to make them visible in sunlight. A DIP-switch setting allows the user to disable these LEDs during standard operation to save power.

**Draft and Insect Immunity**

The sealed optical chamber prevents drafts and insects from affecting the detector.


Australia C-tick  
 Europe IEC IP=54 per IEC 60529  
 OD850-F2 only: Complies with EN50131-1 grade 2

**Installation/Configuration Notes**

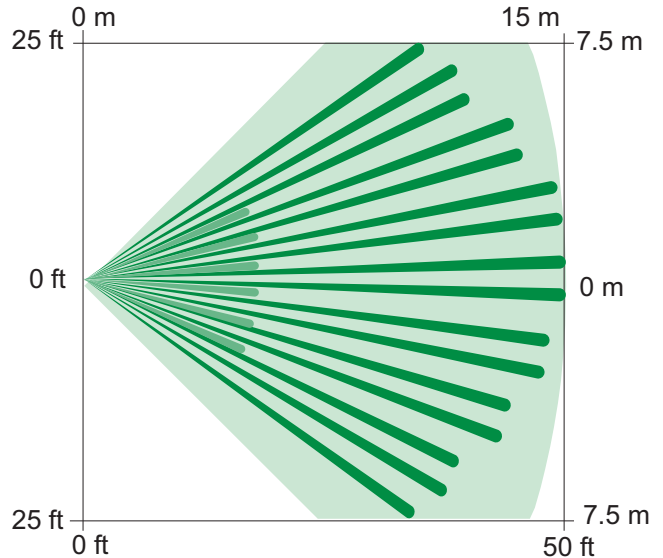

**Top View**

**Standard Broad Coverage: 15 m x 15 m (50 ft x 50 ft)**

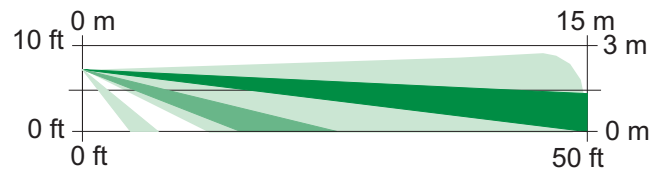

**Side View**

**Standard Broad Coverage: 15 m x 15 m (50 ft x 50 ft)**

**Certifications and Approvals**

Region	Certification	
Europe	CE	89/336/EEC, EN55022: 1998 +A1:2000 +A2:2003, EN50130-4: 1996 +A1:1998 +A2:2003, EN61000-3-3: 1995 +A1:2001, EN61000-4-2: 1995 +A1:1998 +A2:2001, EN61000-4-3: 2002 +A1:2002, EN61000-4-4: 1995 +A1:2000 +A2:2001, EN61000-4-5: 1995 +A1:2001, EN61000-4-6: 1996 +A1:2001, EN61000-4-11" 1994 +A1:2001, EN300 440-1 V1.3.1: 2001-09, EN300 440-2 V1.1.1: 2001-09
Belgium	INCERT	B-509-0038
Russia	GOST	OD850-F1 only: DE.AE63.B03457
USA	UL	OD850-F1 only: ANSR: Intrusion Detection Units (UL639), ANSR7: Intrusion Detection Units Certified for Canada (ULC-S306)
	FCC	OD850-F1 only: ESVOD850-F1
China	CCC	OD850-F1-CHI only: 2009031901000551
Brazil	ANATEL	OD850-F1 only: 0873-03-1855
Singapore	iDA	OD850-F1 only: #LPREQ-S0155-2004

**Mounting Considerations**

- **Wall Mounting:** The OD850 detectors can be mounted directly on a wall or on the supplied B335 Swivel Mount Bracket. Alternatively, they can be mounted directly on a standard rectangular electrical box.
- **Ceiling Mounting:** The detectors can be mounted on a ceiling using the optional B338 Ceiling-Mount Bracket.

**Power Considerations**

- **Power Limits:** Input power must be provided by an Approved Limited Power Source. All outputs must be connected to SELV (safety extra-low voltage) circuits only.
- **Standby Power:** This detector has no internal standby battery. For UL Listed product installations, 4 hr (248 mAh) of standby power must be supplied by the control unit or by a UL Listed burglary power supply.

## Technical Specifications

### Enclosure Design

Dimensions: 16.5 cm x 8.25 cm x 6.35 cm  
(6.5 in. x 3.25 in. x 2.5 in.)

Material: Polycarbonate

Properties: Weather and vandal resistant

Weight: 1.4 oz (40 g)

### Environmental Considerations

IP Rating: 54

Relative Humidity: 0% to 95% non-condensing

Temperature (Operating): -40°C to +54°C (-40°F to +130°F)

OD850-F2: Complies with Environmental Class III  
(EN50130-5)

### Outputs

Alarm: Do not use with capacitive or inductive loads.  
**Form A:** Normally-closed contact opens on alarm.  
**Form C:** Timed relay contact alternates state on alarm and follows an installer programmable timer.  
**Contact Rating:** 3 W, 125 mA maximum, 25 VDC maximum for DC resistive loads; and protected by a 4.7 Ω, ½ W resistor in the common C leg of the relay.

Tamper: Normally-closed (with cover on) contacts rated 125 mA maximum, 25 VDC maximum

### Power Requirements

Current: 62 mA maximum

Input Power: 10 VDC to 15 VDC at 22 mA standby.

## Ordering Information

### OD850-F1 Outdoor TriTech Detector (10.525 GHz) OD850-F1

For use in Belgium, Czech Republic, Denmark, Greece, Hungary, Italy, Netherlands, Norway, Poland, Romania, Spain, Sweden, Ukraine, the Americas and the Asia/Pacific Region. Operates at 10.525 GHz. For use outdoors or in harsh environments. Provides Motion Analyzer II PIR signal processing, two sensitivity levels, draft and insect immunity, and 15 m x 15 m (50 ft x 50 ft) coverage.

### OD850-F1-CHI Outdoor TriTech Detector OD850-F1-CHI

For use in China.. Operates at 10.525 GHz. For use outdoors or in harsh environments. Provides Motion Analyzer II PIR signal processing, two sensitivity levels, draft and insect immunity, and 15 m x 15 m (50 ft x 50 ft) coverage.

### OD850-F2 Outdoor TriTech Detector (10.588 GHz) OD850-F2

For use in France and the United Kingdom. Operates at 10.588 GHz. For use outdoors or in harsh environments. Provides Motion Analyzer II PIR signal processing, two sensitivity levels, draft and insect immunity, and 15 m x 15 m (50 ft x 50 ft) coverage.

### Accessories

#### B338 Universal Ceiling-mount Bracket B338

Swiveling plastic mount for ceiling mounting. The vertical swivel range is +7° to -16°, while the horizontal swivel range is ±45°.

**Americas:**

Bosch Security Systems, Inc.  
130 Perinton Parkway  
Fairport, New York, 14450, USA  
Phone: +1 800 289 0096  
Fax: +1 585 223 9180  
security.sales@us.bosch.com  
www.boschsecurity.us

**Europe, Middle East, Africa:**

Bosch Security Systems B.V.  
P.O. Box 80002  
5600 JB Eindhoven, The Netherlands  
Phone: +31 40 2577 284  
Fax: +31 40 2577 330  
emea.securitysystems@bosch.com  
www.boschsecurity.com

**Asia-Pacific:**

Robert Bosch (SEA) Pte Ltd, Security Systems  
11 Bishan Street 21  
Singapore 573943  
Phone: +65 6258 5511  
Fax: +65 6571 2698  
apr.securitysystems@bosch.com  
www.boschsecurity.com

**Represented by**