

36" APD GOOSENECK PEDESTALS



PRO Features:

- 1) Universal face plate, 6" x 6" x .120" (11 gauge)
- 2) Universal base plate, 5" x 5" x .25" (1/4" plate)
- 3) Cover plate, 5.25" x 5.25" x 2.25" (16 gauge)
- 4) Heavy duty square tube 2" x 2" x .120" wall (11 gauge)
- 5) Mandrel system bend radius 6" on center (no neck collapse)
- 6) Phosphate pretreatment (rust inhibitor)
- 7) TGIC outdoor polyester powder coat with UV protectant
- 8) Includes carriage bolts (4) and nuts (4)
- 9) Boxed individually
- 10) Customizable dimensions and colors available upon request

Models

Model #	Height	Reach	Color Code	Weight	Box Size
36-APD-(add color code)	36"	12"	-BLK = Black Wrinkle -WHI = White* -YEL = Yellow*	17 lbs.	45x12x7



Custom "RAL" colors
*additional lead time
and costs may apply



Description:

A sturdy, cost effective, pad mount, gooseneck pedestal for curbs, entry/exit islands, and parking lots. Meant to hold card readers, intercoms, keypads, entry/exit buttons, biometric readers, telephone entry systems, housings, and other access control devices. Most often installed for automatic gate entry and exit, parking lot, and perimeter access applications.

Includes a face plate with universal holes patterns, heavy duty base plate, and a sliding cover plate to hide the mounting bolts that secure the base. Whereas a competing pedestal may be made from .074" wall tube, this pedestal is made from .120" wall tube (62% more steel) and is designed to withstand abuse from vandals or Mother Nature. This pedestal has passed

our facewind testing protocol which determined it can survive sustained Category 5 hurricane force winds of 157 mph.

The gooseneck is bent with the tightest 6" center radius using a state-of-the-art mandrel bending die in which the curve is formed uniformly without collapsing the underside of the neck. Compared to competing pedestals with very long necks and/or loose bending tolerances, ours is the design preferred by professional installers.

Pedestal PRO leads the industry in quality.

Related Items

Housing



Model # MC-CS-8-E

Housing



Model # Lando-CS-12x8-E

Stud Anchor Kit



Stud Anchor Kit

L-Bolt Kit



L-Bolt Kit

Also Available:


Stainless Steel, Aluminum, and Polycarbonate Solutions

1-800-660-3072
info@PedestalPRO.com
947 W 500 N, Ste 101
Lindon UT 84042
www.PedestalPRO.com

36" APD GOOSENECK PEDESTALS




Dimensions

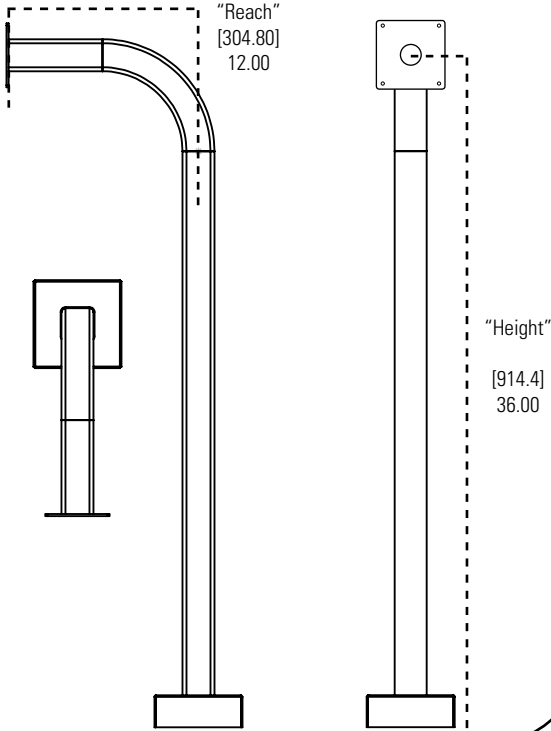


Face Plate

6" x 6" x .120" (11 gauge)

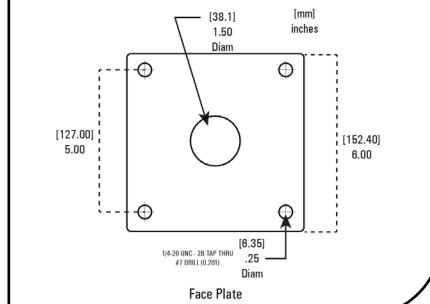


Base Plate

5" x 5" x .25" (.25 plate)

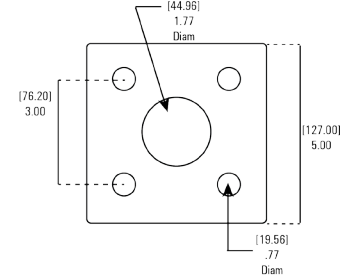

Cover Plate

.065" (16 gauge)

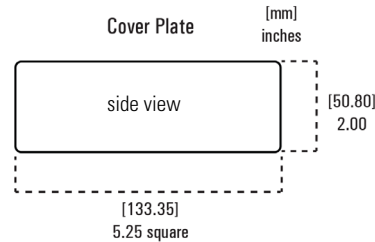

Customize

Stock Color

Black

Readily Available Colors*

White

Safety Yellow

Custom "RAL" colors*





Adjust height, reach, face plate, and base plate specifications to meet your needs*

*additional costs and lead times may apply

Stress Test

Wind Speed: 200 mph (321 km/h)
 Wind Force: 1.3333 psi
 Face Area: 263.5959 in² (each square inch receives 1.3333 psi for a total of 351.34 psi)
 Max Deflection or Displacement: The top corner displaces 0.8 (etc) mm
 Max Stress: 6965.5 psi
 Yield Strength: 89,984.6 psi (strength at which the material bends permanently)
 Interpretation: The highest recorded sustained wind is 217 mph. At 200 mph, the top of the pedestal would move .8 mm without bending permanently. In the real world, the concrete or the mounting bolts and nuts would fail first, not to mention the electronics would blow off even sooner.

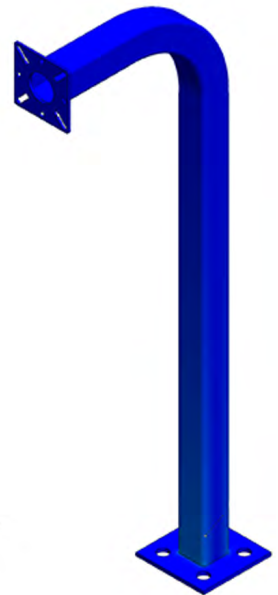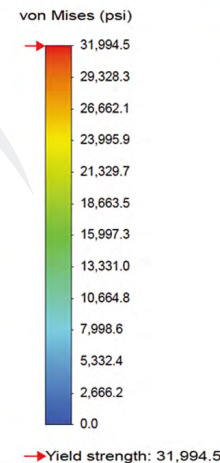

PedestalPRO - 1.800.660.3072 - 947 W 500 N, Ste 101, Lindon, UT 84042
 www.pedestalPRO.com



Pedestal PRO is a Registered Trademark of Pedestal CEO
 © Pedestal CEO, LLC - All Rights Reserved