



Install the AE20 using the three-point configuration. The surface mount and octagonal box installs are the only options in the three-point install. Refer to the following illustration.

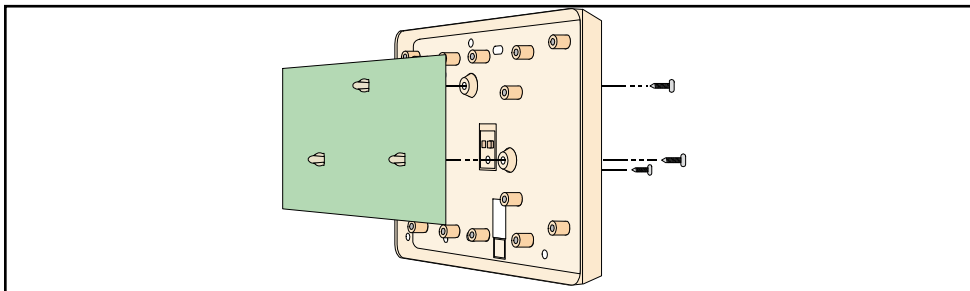

Install the cover tamper screw. Refer to illustration below.

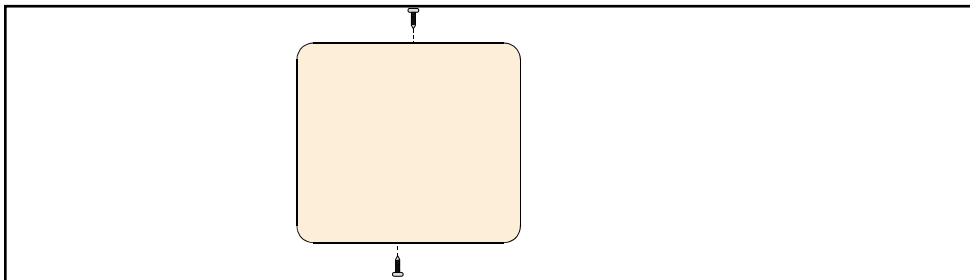

3 | Specifications

Dimensions	(HxWxD) 5 in x 6 in x 1.5 in (12 cm x 16 cm x 4 cm)
------------	---



NOTICE!

Refer to the control panel or module installation instructions for connecting to the control panel.



CAUTION!

All modules used with this enclosure should be power limited. The total power within the enclosure should be no more than 15 W.

For documentation in your specific language, go to your regional Bosch Security website.

Copyright

This document is the intellectual property of Bosch Security Systems, Inc. and is protected by copyright. All rights reserved.

Trademarks

All hardware and software product names used in this document are likely to be registered trademarks and must be treated accordingly.

Bosch Security Systems, Inc. product manufacturing dates

Use the serial number located on the product label and refer to the Bosch Security Systems, Inc. website at <http://www.boschsecurity.com/datecodes/>.

Reading Bosch Security Systems, Inc. Product Date Codes

For Product Date Code information, refer to the Bosch Security Systems, Inc. Web site at: <http://www.boschsecurity.com/datecodes/>.

© 2018 Bosch Security Systems, Inc. 130 Perinton Parkway Fairport, NY 14450
Bosch Sicherheitssysteme GmbH, Robert-Bosch-Ring 5, 85630 Grasbrunn, Germany



Universal Enclosure AE20



en Installation Guide



Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, NY 14450
USA
www.boschsecurity.com

Bosch Sicherheitssysteme GmbH
Robert-Bosch-Ring 5
85630 Grasbrunn
Germany

1 | Overview

This enclosure holds several Bosch and EDM input, output, and receiver modules.


2 | Installation




NOTICE!

Failure to follow the mounting instructions can damage the enclosure.

1. Open by inserting a screwdriver into the two slots.

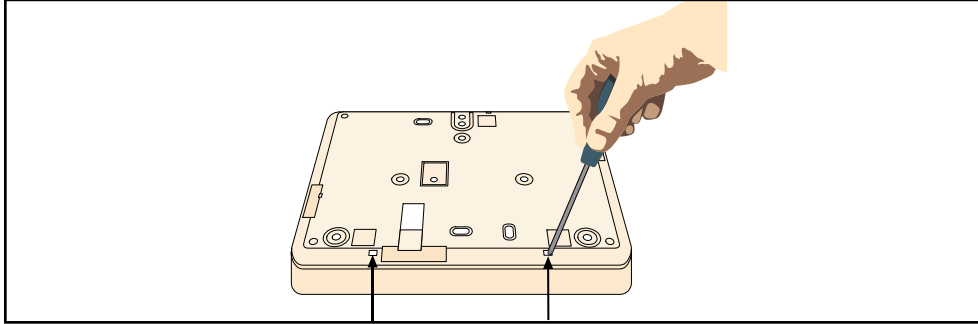

2. Use the mounting holes when installing to an electrical box.

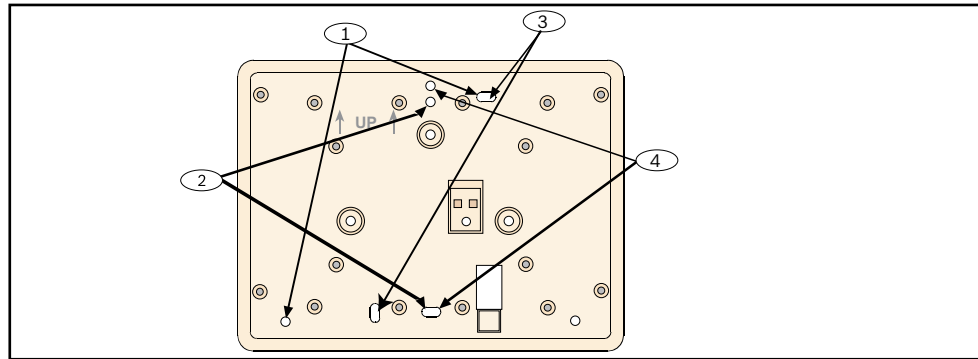


Callout	Description	Callout	Description
1	4 in (10 cm) square	3	Double-gang box
2	Single-gang box	4	3.5 in (9 cm) octagon



NOTICE!


The wall tamper does not function when you install to an electrical box.

3. Install a 3-point module before installing the enclosure to the wall.

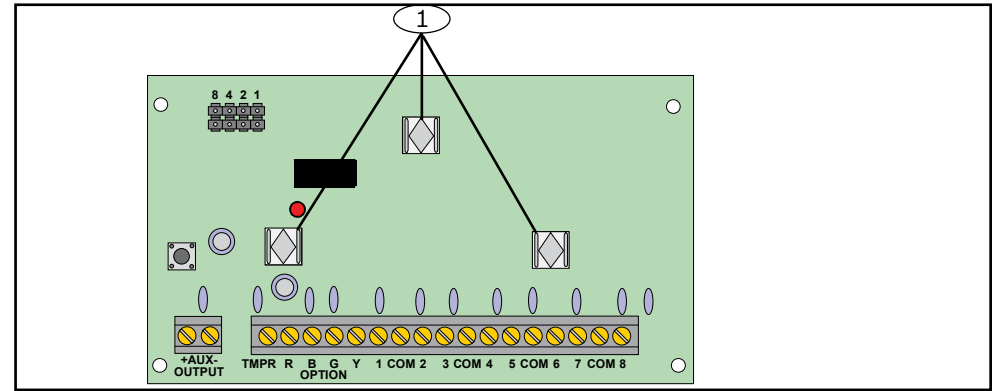

Callout	Description
1	Three-point mounting slots

4. Attach to the surface. Refer to the following illustration.

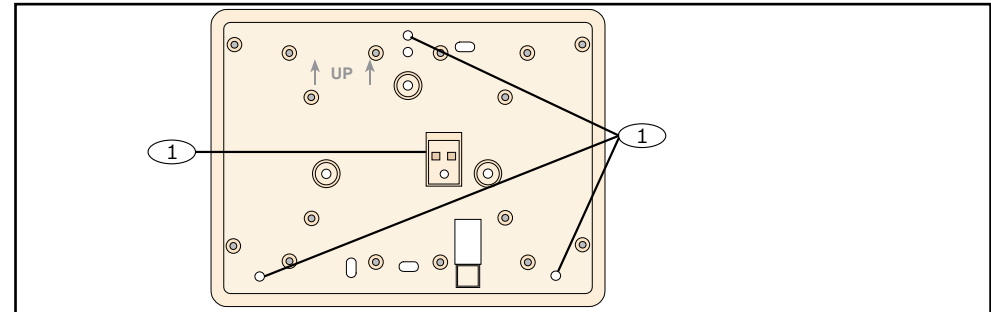

Callout	Description	Callout	Description
1	Surface install holes	2	Wall tamper screw location



NOTICE!

Inserting a screw into the tamper bracket keeps the bracket and AE20 separate when the screw is tightened, or when the AE20 is removed. For proper alignment, insert this screw last.

3 | Attaching

Install a module into the AE20. Refer to the following illustration.

