

## MANUAL INTERCOM SYSTEMS

## **KB-ML-5 – 5 Channel Master**

## **Description**

Talkaphone's **KB-ML-5** is a durable, reliable solution for any 5-channel application where the Master does not need to talk handsfree.

#### **Features**

- Master presses one button to talk
- In non-private mode sub-stations speak hands-free, master can listen to any/all stations hands-free
- In private mode, master and sub-stations talk by pressing one button
- · Built-in "All Call" control makes paging easy
- Completely self-contained—no separate junction box or amplifier

## **Specifications**

Dimensions (W x D x H): 10.5 x 3.13 x 8.75 in. (267 x 80 x 222 mm)

Weight: 7.0 lbs. (3.2 kg)

Construction: Vinyl coated steel

Mounting: Designed for desk mounting

Power: 120VAC required for 24VDC, 600mA power supply

Cable: One shielded pair needed for all sub-stations (model **6303**)

Warranty: 2-year warranty

**Options** 

Annunciation: Order model **KB-ML-5WA** for a 5-channel intercom with annunciation tones and lights that

identify calling stations.

Cable: Order model 6303 3-conductor 22-gauge solid copper/tin cable to connect each sub-

station to the master.

**Sub-Stations** 

With Call Button: Model K-LR-3W flush mounts—use K-SM-L accessory to surface mount. Model K-LR-3

is a desk-style version of K-LR-3W.


Without Call Button: Model K-LR-2R flush mounts—use K-SM accessory to surface mount.


Cradle Phone: Model **K-S-112X** provides clear communication and privacy in a noisy environment.

Ceiling Speaker: Model S-8318B is an 8" ceiling speaker (for use indoors) with white metal baffle and built-

in volume control.

# **Dimensional Diagram**

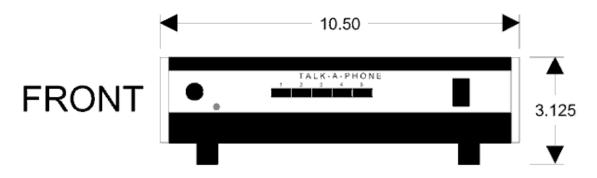

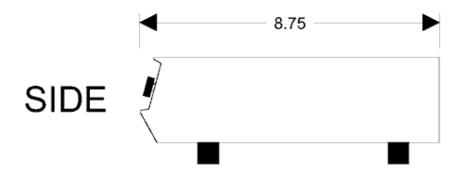

All dimensions are in inches and are provided for reference only.